

1.0A Single-Phase GLass Passivated Bridge Rectifiers



Recifier Reverse Voltage 50V to 1000V


MBS

Features

- Glass passivated junction
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Suge overload ratings to 50 amperes peak
- Ideal for printed circuit board application
- High temperature soldering guaranteed 265°C/10 seconds at 5 lbs(2.3kg)tension

Mechanical Data

Case:Molded plastic
 Terminals:Platde leads solderable per MIL-STD-750, Method 2026
 Polarity:Polarity symbols molded or Marked on body
 Mounting Position:Any
 Weight:0.0043ounce,0.12 grams(approx)

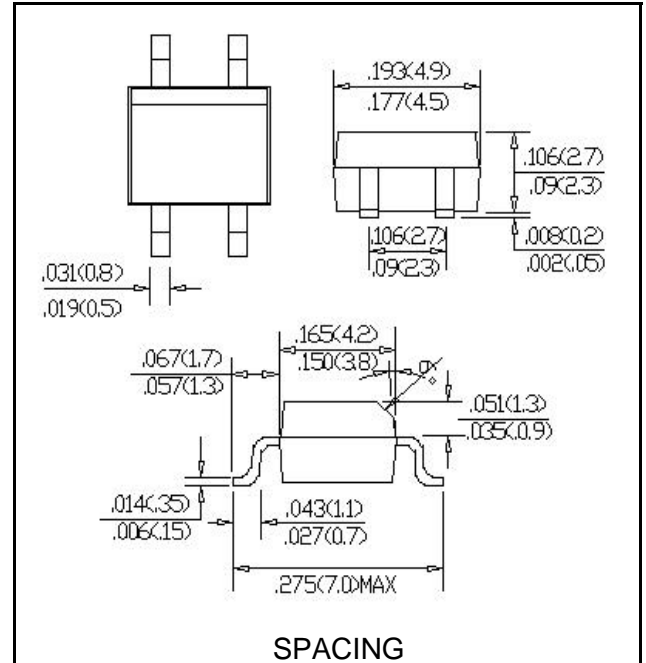

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified,Resistive or inductive load,60HZ.
 For Capacitive load derate current by 20%

Parameter	Symbol	MB05S	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C	IF(AV)	1.0							A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM	50							A
Rating for fusing(t<8.3ms)	I ² t	10							A ² sec
Typical thermal resistance per element(1)	ReJA	75							°C/w
Typical thermal resistance per element(2)	Cj	13.0							PF
Operating junction and stroage temperature range	TJ, TSTG	-55to+150							°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified,Resistive or inductive load,60HZ.
 For Capacitive load derate current by 20%

Parameter	Symbol	MB05S	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S	unit
Maximum instantaneous forward voltage drop per leg at 1.0A	VF	1.1							V
Maximum DC reverse current at ratde TA=25°C	IR	5							UA
DC blocking voltage per element TA=125°C		500							

Notes:(1)Thermal resistance from Junction to case.

(2)Measured at 1.0MHz and applied reverse voltage of 4.0 V DC.

(3)Mounted on P.C.board.

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

FIG.1-DERATING CURVE FOR

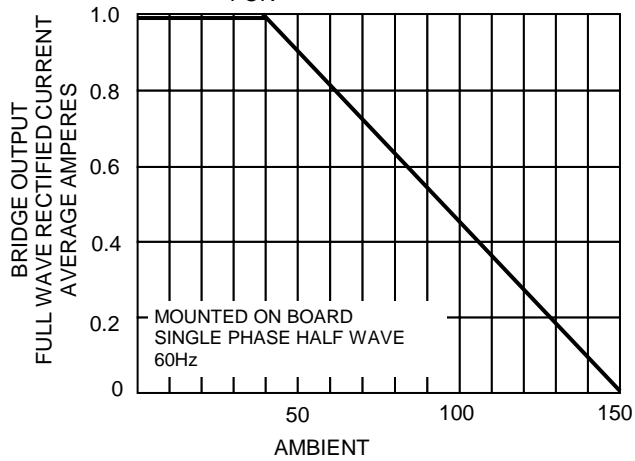


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

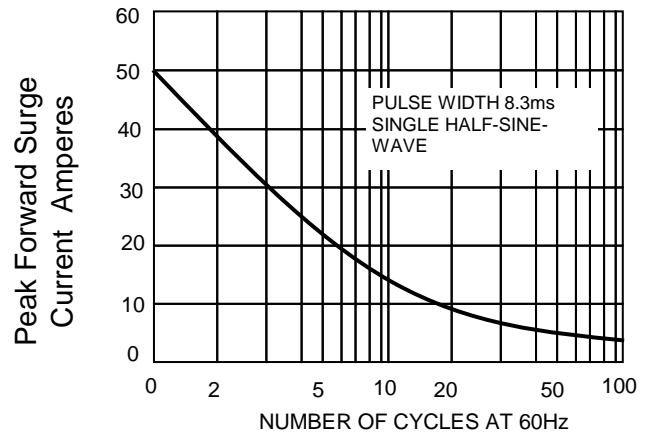


FIG.3-TYPICAL JUNCTION

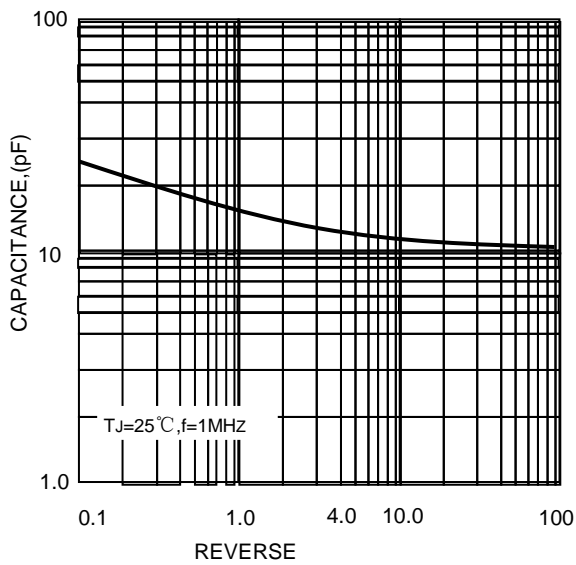


FIG.4-TYPICAL FORWARD CHARACTERISTICS

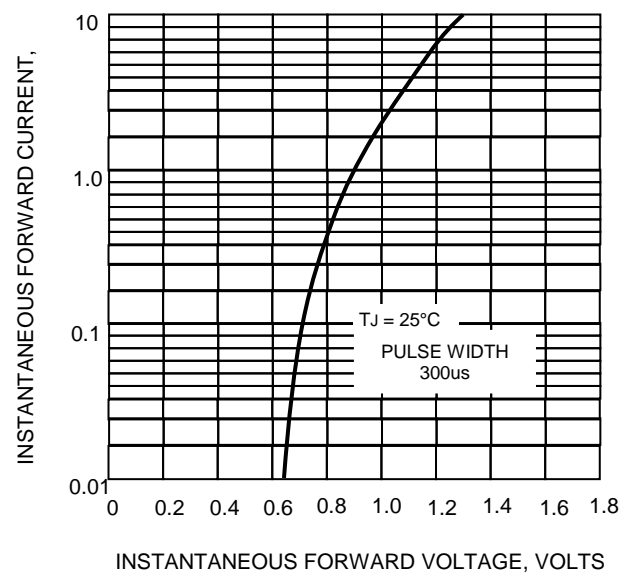


FIG.5-TYPICAL REVERSE

