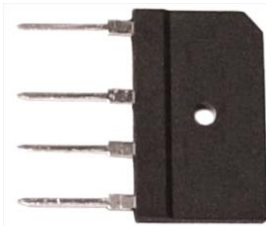
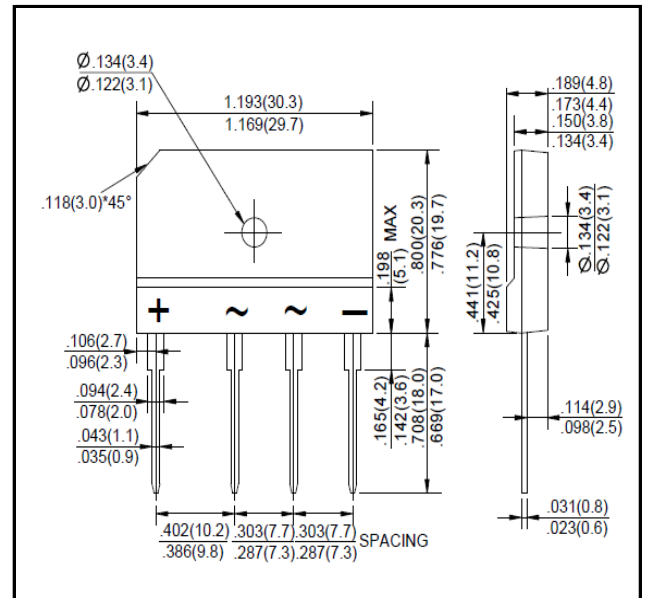


**4.0A Single-Phase Glass Passivated Bridge Rectifiers**

Rectifier Reverse Voltage 50V to 1000V


**GBJ**

**Features**

- Rating to 1000V PRV
- Ideal for printed circuit board
- Low forward voltage drop, high current capability
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- The plastic material has U/L flammability classification 94V-0
- Weight: 0.24 ounce, 6.79 grams (approx)

**Maximum Ratings & Thermal Characteristics** Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified, Resistive or inductive load, 60HZ.

For Capacitive load derate current by 20%

Parameter	Symbol	KBJ 4005	KBJ 401	KBJ 402	KBJ 404	KBJ 406	KBJ 408	KBJ 410	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C	IF(AV)	4.0 2.4							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	120							A
Maximum instantaneous forward voltage drop per leg at 2A DC	VF	1.1							V
Maximum DC reverse current at rated TA=25°C	IR	10							UA
DC blocking voltage per element TA=125°C		500							
Rating for fusing (t<8.3ms)	I <sup>2</sup> t	120							A <sup>2</sup> sec
Typical thermal resistance per element(1)	ReJA	1.8							°C/w
Mounting torque (Suggests 0.45~0.65)	Tor	Rating Torque: 0.8 (Suggests 0.45~0.65)							N.m
Typical thermal resistance per element(2)	Cj	55.0							PF
Operating junction and storage temperature range	TJ, TSTG	-55 to +150							°C

Notes: (1) Device mounted on 75mm\*75mm\*1.6mm Cu plate heatsink.

(2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts.

## Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

FIG.1-DERATING CURVE FOR

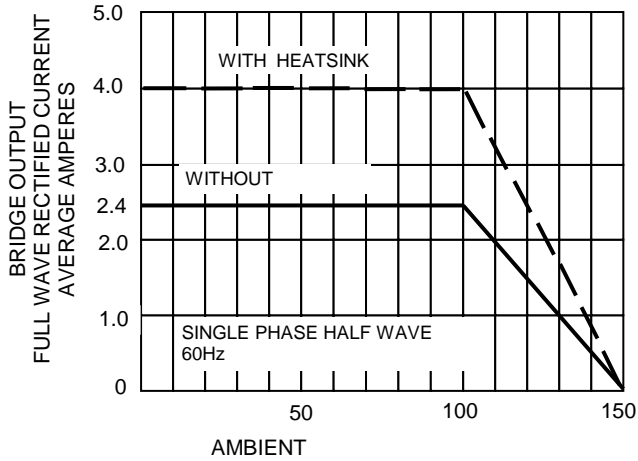


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

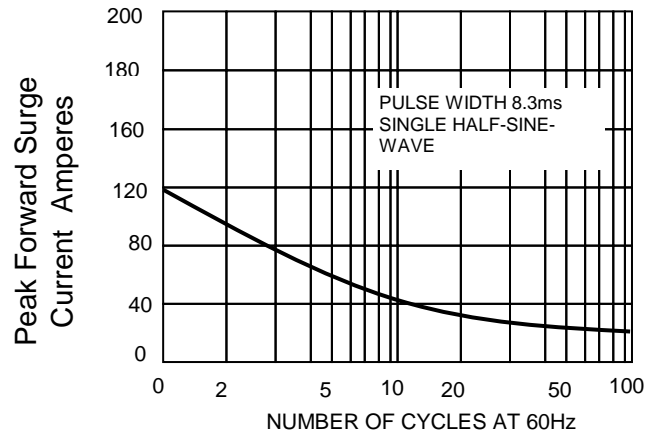


FIG.3-TYPICAL JUNCTION

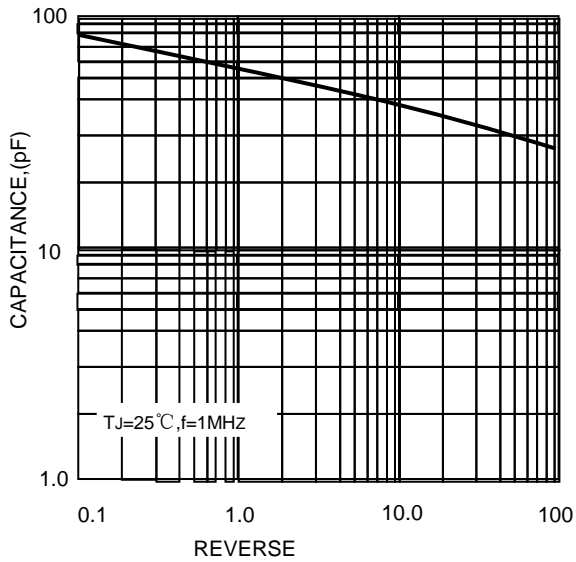


FIG.4-TYPICAL FORWARD CHARACTERISTICS

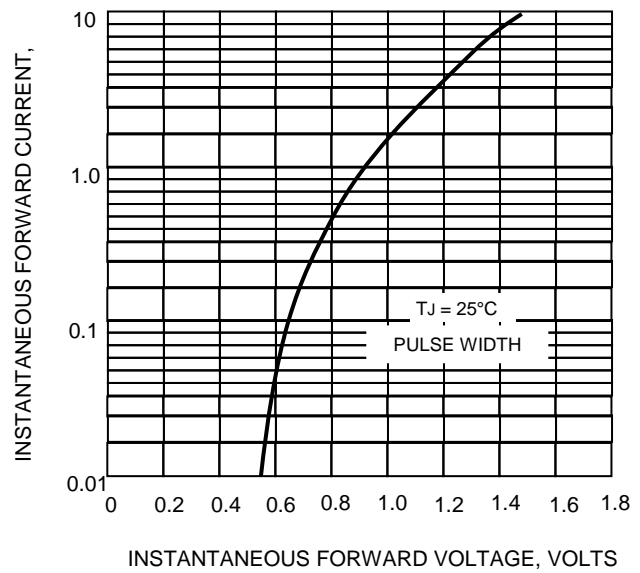


FIG.5-TYPICAL REVERSE CHARACTERISTICS

